



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : G02F 1/1335	A1	(11) International Publication Number: WO 00/41030 (43) International Publication Date: 13 July 2000 (13.07.00)
<p>(21) International Application Number: PCT/US99/27720</p> <p>(22) International Filing Date: 22 November 1999 (22.11.99)</p> <p>(30) Priority Data: 09/224,591 31 December 1998 (31.12.98) US</p> <p>(71) Applicant: HONEYWELL INC. [US/US]; Honeywell Plaza, Minneapolis, MN 55408 (US).</p> <p>(72) Inventors: LARSON, Brent, D.; 4713 E. Cascalote Drive, Cave Creek, AZ 85331 (US). HAIM, Elias, S.; 18863 N. 69th Avenue, Glendale, AZ 85308 (US).</p> <p>(74) Agent: ANDERSON, William, C.; Honeywell Inc., Honeywell Plaza - MN12-8251, P.O. Box 524, Minneapolis, MN 55440-0524 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).</p> <p>Published <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>
<p>(54) Title: REDUCED REFLECTANCE POLARIZED DISPLAY</p> <p>(57) Abstract</p> <p>A method and apparatus according to various aspects of the present invention provides a polarized display exhibiting reduced reflectances. A polarizer is disposed adjacent to a cover glass in front of the display. Light intended to be transmitted by the display is transmitted by the polarizer. Light reflected after passing through the polarizer reverses polarization, and is absorbed as it intercepts the polarizer following reflection.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

REDUCED REFLECTANCE POLARIZED DISPLAY

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

The invention relates to displays, and more particularly, to methods and
5 apparatus for reducing unwanted reflections in displays.

DESCRIPTION OF THE RELATED ART

In display applications, it is difficult to maintain high contrast output at
high ambient illumination levels. However, polarized light displays and active
10 matrix liquid crystal display (AMLCD) flat panels work well in maintaining the
contrast in their displays because light passes through several absorbing layers
before reflecting or scattering back out from the light producing mechanism. The
multiple layers, however, adversely affect the total reflectance of the display.
Even though the reflectance at layer boundary in itself may be quite small, the
15 sum of the reflections may be significant.

Referring to Figure 1, a conventional polarized display 2, such as a liquid
crystal display (LCD), includes a cover glass 4 having an antireflective coating 6.
A front polarizer 8, a first substrate 10, a liquid crystal layer 12, a second substrate
14, and a rear polarizer 16 are sandwiched between the cover glass 4 and a
20 backlight 18. The cover glass 4 is separated from the front polarizer 8 by a gap 9,
typically filled with air. The reflectance at each boundary between the layers adds
to the overall reflectance of the display. Reflectances associated with the
boundaries between the cover glass 4, the gap 9, and the front polarizer 8 are
especially pronounced.

25 Several methods have been developed to reduce reflectances. For
example, antireflection coatings 6 may be added to one or both sides of the cover
glass 4, which tends to reduce the reflection from the front of the cover glass 4.
Additionally, an antireflection coating may be added to the surface of the front
polarizer 8. However, the suppression of the residual reflection still remains a
30 problem. Another method involves applying adhesives between the cover glass 4
and the front polarizer 8 to bond the glass to the polarizer and achieve some level
of index matching, which tends to reduce the reflectances from the boundary
between the cover glass 4 and the air gap 9 or the front polarizer 8. While
bonding the cover glass 4 to the display is somewhat successful in reducing

reflectances, it tends to affect the uniformity of the liquid crystal cell gap, induces difficulty in repairs, and is associated with other problems due to aging effects and shrinkage of the adhesive.

Another alternative is to add attenuating contrast enhancement filters to the display to filter out the reflectances. For example, a filter may be added between the cover glass 4 and the gap 9 or the front polarizer 8, or alternatively a specialized tinted glass may be used for the cover glass 4. Addition of the filter reduces reflection, but also attenuates the display output. Further, addition of the filter tends to promote other issues, such as cost, color shifts, and environmental concerns.

SUMMARY OF THE INVENTION

A display according to various aspects of the present invention comprises a polarized display that has reduced reflectances in the output of the display to maintain high contrast output, high illumination levels, and less expensive production. A polarizer is disposed adjacent to a cover glass in front of the display. Light intended to be transmitted through the display is transmitted by the polarizer. Light reflected after passing through the polarizer is further attenuated as it intercepts the polarizer following reflection.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

The subject matter of the invention is particularly pointed out and distinctly claimed in the concluding portion of the specification. The invention, however, both as to organization and method of operation, may best be understood by reference to the following description taken in conjunction with the claims and the accompanying drawing, in which like parts may be referred to by like numerals:

Fig. 1 shows a conventional polarized display.

Fig. 2 shows a polarized display according to various aspects of the present invention.

Fig. 3 shows an alternate embodiment of a polarized display according to various aspects of the present invention.

DETAILED DESCRIPTION OF PREFERRED EXEMPLARY EMBODIMENTS

The subject matter of the present invention is particularly suited for use in connection with displays, such as LCDs. As a result, the preferred exemplary embodiment of the present invention is described in that context. It should be
5 recognized, however, that such description is not intended as a limitation on the use or applicability of the present invention, but is instead provided merely to enable a full and complete description of a preferred embodiment.

Referring now to Figure 2, a display 2 according to various aspects of the present invention comprises: a cover glass 4; a front gap 9; a front polarizer 8; a
10 first substrate 10; a liquid crystal layer 12; a second substrate 14; a rear polarizer 16; an auxiliary polarizer 20; and a backlight 18. Each of the components of the display 2 is suitably a conventional LCD component. In particular, the cover glass 4 suitably comprises a conventional cover glass for use in conjunction with
15 LCDs, especially high contrast LCDs, to protect the underlying components and transmit light from the backlight passing through the other components. While referred to as a cover glass, the cover glass 4 can be made from glass, plastic or any other fully or partially transparent material with suitable physical properties. To reduce reflections at the boundary between the cover glass 4 and the front gap
20 9, the rear surface of cover glass 4 adjacent the front gap boundary 9 or auxiliary polarizer 20 may include a suitable antireflection material. For example, the rear surface of the cover glass 4 may include an antireflection coating, film, sheet, or any other form of antireflection material. The addition of the antireflection coating to the rear of the cover glass 4 tends to reduce reflections at the boundary
25 between the cover glass 4 and the auxiliary polarizer 20 or, if the auxiliary polarizer 20 is omitted, the front gap 9.

The front and rear polarizers 8, 16 suitably comprise conventional polarizers for use in conjunction with LCDs. The front and rear polarizers 8, 16 may be oriented in any suitable manner to selectively transmit light from the
30 backlight 18 to the viewer through the front and rear polarizers 8, 16 and the liquid crystal layer 12.

Similarly, the first and second substrates 10, 14 suitably comprise conventional LCD transparent substrates. The substrates 10, 14 suitably comprise

sheets of transparent material, such as glass coated with indium tin oxide or otherwise suitably coated glass or transparent polymer.

A space is formed between the substrates 10, 14 and filled with the liquid crystal layer 12. The liquid crystal layer 12 may comprise any suitable liquid
5 crystal material, such as a twisted nematic or supertwisted nematic material. A seal formed around the edges of the substrates 10, 14 inhibits leakage of the liquid crystal material 12 from between the substrates 10, 14. The display may comprise a monochrome gray-scale display, a binary display, a color display, or any other type of display. Similarly, the backlight 18 comprises any appropriate light
10 source for illuminating display 2. In some embodiments, the backlight 18 may be omitted and the display 2 reconfigured as a reflective display.

In the present embodiment, the display includes the auxiliary polarizer 20 between the front gap 9 and the cover glass 4. The front gap 9 separates the auxiliary polarizer 20 from the front polarizer 8. The auxiliary polarizer 20 may
15 be bonded to the cover glass 4 or otherwise retained in display 2, and may be coated with an antireflective coating on one or both surfaces. The auxiliary polarizer 20 is an absorbing polarizer, preferably of a similar type as the front polarizer, and is preferably aligned in the same direction as the front polarizer 8. Alignment of the polarizers 8, 20 in the same direction minimizes the attenuation
20 of light coming from the backlight 18. This allows maximum transmission of the light with little to no attenuation of the light. Reflected light, however, initially passes through the cover glass and is polarized by the auxiliary polarizer 20. By removing one of the polarizations before it reaches the gap 9, the reflections from each of the interfaces between the auxiliary polarizer 20 and front polarizer 8 are
25 reduced by around 50%. This allows for reduced overall reflections, or can be used to reduce the reflectance requirements for any antireflection coatings which may be applied to the front and auxiliary polarizers 8, 20.

Whereas the incorporation of auxiliary polarizer 20 affects the reflectances in the vicinity of the gap 9 most directly, the configuration can also be adjusted in
30 a manner which provides very convenient and beneficial introduction of attenuation for other reflectances. By selecting an auxiliary polarizer 20 with somewhat lower transmittance, the functionality of a conventional attenuating contrast enhancement filter can be achieved without additional elements or cost. Alternately, similar attenuation can be achieved by rotating the polarizing axis of

auxiliary polarizer 20 relative to the polarizing axis of front polarizer 8. In both cases, a significant degree of contrast enhancement can be achieved with a minimum of additional cost, complexity or risk of chromatic variation in the display output.

5 In an alternative embodiment, the auxiliary polarizer 20 is included in the display 2, and the front polarizer 8 is omitted. Operationally, the display 2 functions identically; light transmitted through the liquid crystal layer 12 is either polarized in the direction of the rear polarizer 16 (i.e., substantially unaffected by the liquid crystal layer 12), or is polarized in another direction by the liquid crystal
10 layer 12. Whether the light is transmitted to the viewer depends on the orientation of the front polarizer 8 or, in the present embodiment, the auxiliary polarizer 20. In the absence of the front polarizer 8, light which is not polarized in alignment with the auxiliary polarizer 20 is absorbed and not transmitted to the user.

 Another embodiment of the present invention includes an index matching
15 material disposed in the front gap 9. The index matching material may comprise any suitable material for more closely matching the refractive index of the materials adjacent the front gap 9, such as the cover glass 4, auxiliary polarizer 20, or the antireflection material on the rear of cover glass 4, and the front polarizer 8 or the antireflection material on the front surface of the front polarizer 8. The
20 index matching material may comprise any material having an appropriate refractive index, may be in any suitable form, such as gel, epoxy, oil, liquid, plastic, gas, or the like. In addition, the index matching material may also have an appropriate antireflective material, such as a coating, plating, or film, to further reduce reflections.

25 The front polarizer 8, the rear polarizer 16, and/or the auxiliary polarizer 20 may also include antireflection material to reduce reflectance. For example, any or all of the polarizers may be coated, plated, or otherwise integrated with or adjacent to an antireflection material. In one embodiment, the antireflection material is integrated into the polarizer, such as with commercially available
30 antireflection-coated polarizers available from Nitto or other polarizer suppliers. In addition, any or all of the polarizers 8, 16, 20, particularly auxiliary polarizer 20, may be lower efficiency polarizers which transmit only a fraction of the light polarized in the direction of polarization. For example, a polarizer which transmits 85% of the light polarized in the direction of polarization transmits 85%

of the light from the backlight to be transmitted. The polarized portion of the light reflected through the cover glass 4, however, is attenuated as it passes through the polarizer both ways. Therefore, the overall reflectance of the polarized portion is reduced by 27.75%. This configuration may be appropriate for various applications requiring low reflectance and adaptable to less than optimal overall brightness.

Referring to Figure 3, another display according to various aspects of the present invention employs circular polarization to reduce reflectances in the vicinity of the gap 9. A linear auxiliary polarizer 20 is disposed adjacent to the cover glass 4. A retarder, such as a quarter wave retarder 22a, is disposed adjacent to the linear auxiliary polarizer 20, such that light passing through the auxiliary polarizer 20 and the wave retarder 22a is substantially circularly polarized. Similarly, a second quarter wave retarder 22b is disposed adjacent to the front polarizer 8 to achieve substantially circular polarization for light which passes through the display from the other side. The retarder axes are arranged at a suitable angle from the polarizer axes, such as 45 degrees, to achieve substantially circular polarization in the gap 9 for light incident from either the front or back of the display. The auxiliary polarizer 20 and the retarders 22a-b are oriented to achieve the same substantially circular orientation, or "handedness" (i.e., left-handed or right-handed), so that light transmission from the backlight 18 is not affected. For example, light passing through the front polarizer 8 and the first wave retarder 22a is circularly polarized in a first direction. Because the auxiliary polarizer 20 and the second wave retarder 22b transmit light having the same circular polarization as the front polarizer 8 and the first wave retarder 22a, light from the backlight 18 tends to be transmitted.

Reflected light, however, is absorbed by the polarizers. Light initially transmitted through the auxiliary polarizer 20 and the first retarder 22a is circularly polarized in a first direction. Light reflected from a boundary, however, reverses the direction of its circular polarization. Thus, as the reflected light from the interface between the gap 9 and the retarder 22a, or the gap 9 and the retarder 22b, intercepts the auxiliary polarizer 20 and the retarder 22a, the light is absorbed.

While the present circular polarization method is effective at eliminating the reflectance associated with the gap 9 and its surrounding layers, even further

reduction is possible by suitably associating each of the retarders 22a-b with at least one antireflection layer, for example between the retarders 22a-b and their respective polarizers 8, 20 or the gap 9 to reduce reflections at the corresponding boundary.

5 In one embodiment of the present display, the quarter wave retarders 22a and 22b are identical but are oriented with their respective optical axes offset by 90 degrees from each other. In this case, the front polarizer 8 and the auxiliary polarizer 20 are preferably oriented with parallel polarization axes. This configuration uses common components and tends to provide both minimum
10 reflection and maximum transmission for light which is distributed over a moderate range of angles relative to the display normal. At very steep, or wide angles, performance can be degraded slightly, however, both in terms of reflection or especially transmission. Alternative configurations may provide optimization for displays requiring wide angle performance.

15 In an alternative embodiment of the present display configured for wide angle operation, the quarter wave retarders 22a, 22b have opposing birefringence to improve the transmissibility of the display at large viewing angles. One quarter wave retarder has positive birefringence ($n_e > n_o$) and the other quarter wave retarder has negative birefringence ($n_e < n_o$). The optical axes of the quarter wave
20 retarders are aligned parallel to one another and 45 degrees from the polarization axis. In this configuration, the phase shifts through the retarders 22a and 22b cancel each other out over a wide angular range.

Additional circular polarizer configurations can be designed which incorporate multiple layer retarders and irregular materials or angles. These might
25 be used, for example, to implement wide-band quarter wave retarders, to achieve achromatic performance, to shift the angle at which maximum reflectance reduction is obtained, or even to achieve chromatic performance which varies with angle of the transmitted light.

While the principles of the invention have now been made clear in
30 illustrative embodiments, there will be immediately obvious to those skilled in the art many modifications of structure, arrangements, proportions, the elements, materials and components, used in the practice of the invention which are particularly adapted for a specific environment and operating requirements without departing from those principles.

CLAIMS

1. A reduced reflectance polarized display for use with a light source, comprising:

- 5 a display apparatus located a small distance in front of the light source;
a cover glass, having a front side and a back side, located a small distance in front of the display apparatus with the back side facing the display apparatus; and
an auxiliary polarizer attached to the back side of the cover glass facing
10 the display apparatus to reduce reflections wherein only apparatus existing between the display apparatus and the cover glass is the auxiliary polarizer.

2. The display of claim 1 wherein the auxiliary polarizer is coated with an antireflection coating facing the display apparatus to further reduce
15 reflections.

3. The display of claim 1 wherein the display apparatus has a front side and a back side, further comprising:

- a first substrate attached to the front side of the display apparatus and a
20 second substrate attached to the back side of the display apparatus;
a front polarizer, having an antireflection coating, attached to the first substrate facing the auxiliary polarizer; and
a rear polarizer attached to the second substrate facing the light source.

25 4. The display of claim 1, further comprising a first quarter wave retarder attached to the auxiliary polarizer and a second quarter wave retarder attached to the display apparatus facing the auxiliary polarizer.

5. The display of claim 3, further comprising a first quarter wave
30 retarder attached to the auxiliary polarizer and a second quarter wave retarder attached to the front polarizer.

6. The display of claim 3 wherein the auxiliary polarizer and the front polarizer are aligned in the same direction.

7. The display of claim 3 wherein the auxiliary polarizer and the front polarizer have parallel polarization axes.

5 8. The display of claim 5 further comprising antireflection coatings on the first quarter wave retarder and the second quarter wave retarder.

9. The display of claim 5 wherein the first quarter wave retarder and the second quarter wave retarder have opposing birefringence.

10

10. The display of claim 5 wherein the first quarter wave retarder and the second quarter wave retarder are wideband quarter wave retarders.

15

11. A reduced reflectance polarized display for use with a backlight, comprising:

20

a display layer placed between a front substrate and a rear substrate, both having a first and second surface wherein a rear polarizer is attached to the second surface of the rear substrate, located closer to the backlight, and a front polarizer is attached to the first surface of the front substrate wherein the front polarizer is coated with an antireflection coating; and

a cover glass having a first side and a second side with an antireflection coating coated on the first side; and

25

an auxiliary polarizer attached to the second side of the cover glass wherein the auxiliary polarizer, located a small distance from the front polarizer, is facing the front polarizer to reduce reflections in the display wherein only apparatus existing between the front polarizer and the cover glass is the auxiliary polarizer.

30

12. The display of claim 11 wherein the auxiliary polarizer is coated with an antireflection coating facing the front polarizer to further reduce reflections in the display.

13. The display of claim 11, further comprising a first quarter wave retarder attached to the auxiliary polarizer and a second quarter wave retarder attached to the front polarizer.

5 14. The display of claim 11 wherein the auxiliary polarizer and the front polarizer are aligned in the same direction.

15 15. The display of claim 11 wherein the auxiliary polarizer and the front polarizer have parallel polarization axes.

10 16. The display of claim 13 further comprising antireflection coatings on the first quarter wave retarder and the second quarter wave retarder.

15 17. The display of claim 13 wherein the first quarter wave retarder and the second quarter wave retarder have opposing birefringence.

20 18. The display of claim 13 wherein the first quarter wave retarder and the second quarter wave retarder are wideband quarter wave retarders.

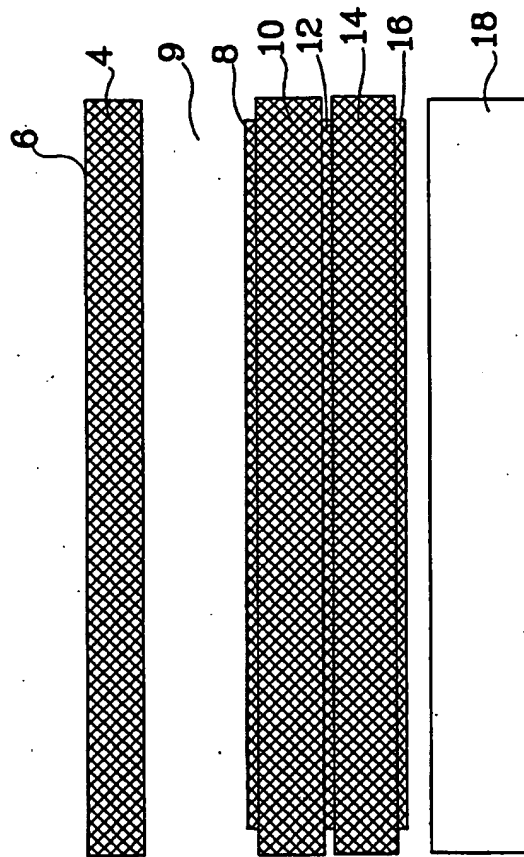


Fig. 1

2/3

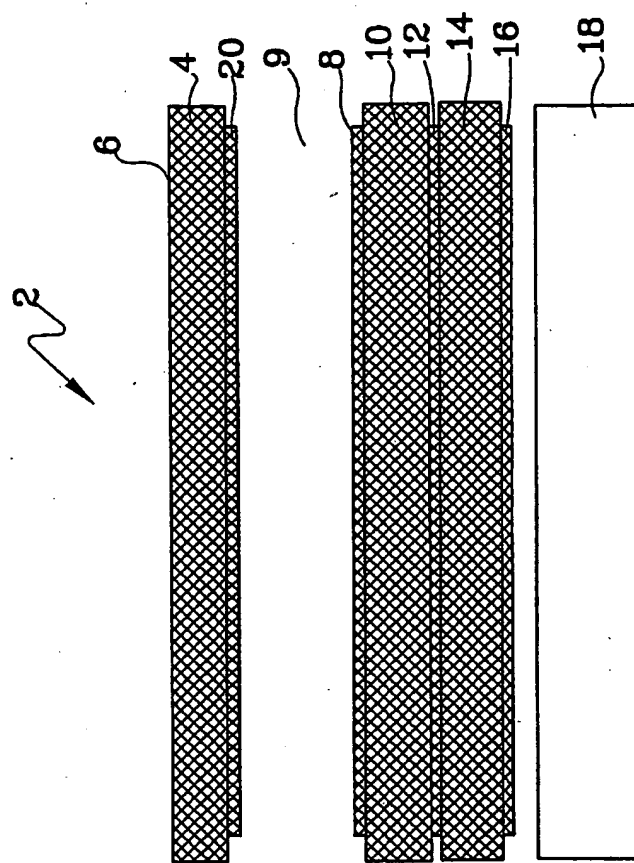


Fig. 2

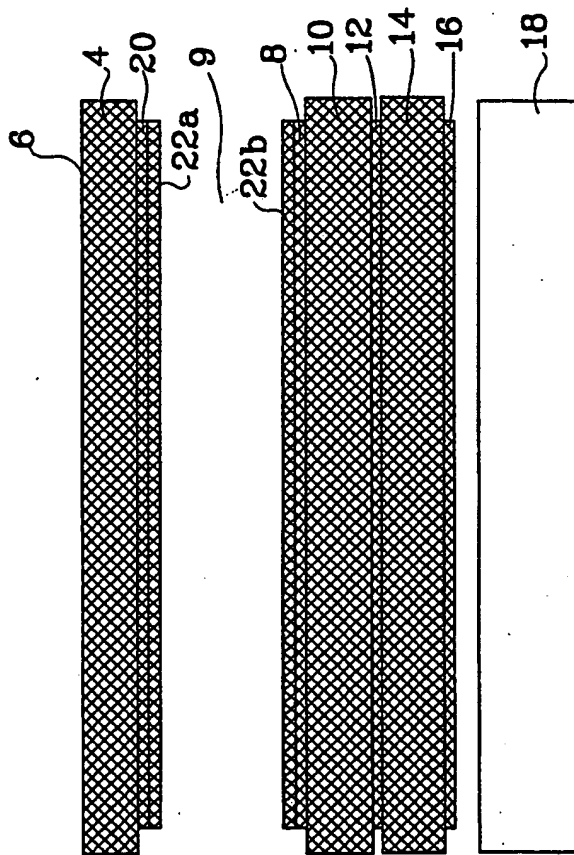


Fig. 3

INTERNATIONAL SEARCH REPORT

Int'l Application No

PCT/US 99/27720

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G02F1/1335

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G02F G02B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	PATENT ABSTRACTS OF JAPAN vol. 1996, no. 03, 29 March 1996 (1996-03-29) & JP 07 301795 A (SHIMADZU CORP), 14 November 1995 (1995-11-14) abstract	1-3, 11, 12
A	-& JP 07 301795 A figures 1,4,8	4-10, 13-18
X	US 5 486 840 A (ALLISON CHARLES R ET AL) 23 January 1996 (1996-01-23) column 1, line 65 -column 2, line 55 column 3, line 32 -column 4, line 49; figures 4,5	1
A		4-11, 13-18
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

9 May 2000

Date of mailing of the international search report

- 18/05/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Manntz, W

INTERNATIONAL SEARCH REPORT

Int. .donsal Application No

PCT/US 99/27720

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 701 165 A (KUBO MASUMI ET AL) 23 December 1997 (1997-12-23) column 13, line 44 -column 15, line 35; figure 12	1-18

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/27720

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 07301795 A	14-11-1995	NONE	
US 5486840 A	23-01-1996	NONE	
US 5701165 A	23-12-1997	JP 8076081 A DE 19520626 A KR 185455 B	22-03-1996 11-01-1996 01-05-1999